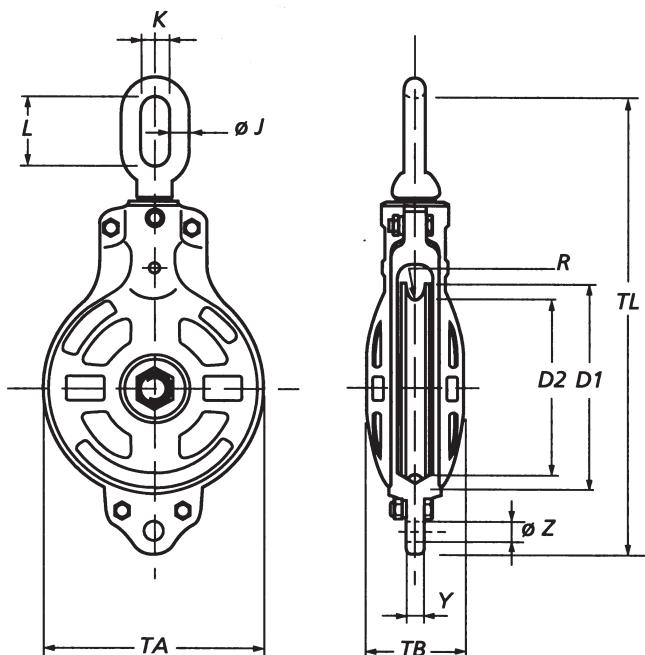


**American pattern cargo blocks**
**1 sheave / oval eye**


Stock No.	WLL (tons)	Rope size up to (mm)	Dimensions (mm)										Weight (kgs)	
			D1	D2	J	K	L	R	Y	Z	TA	TB	TL	
17.008.06.11	6	16 - 20	200	165	25	43	85	10	36	30	225	120	522	20
17.010.06.11	6	16 - 20	260	225	25	43	85	10	36	30	285	135	592	26
17.012.10.11	10	20 - 22	300	265	28	50	92	11	38	30	330	140	667	40
17.014.10.11	10	20 - 24	340	300	35	50	97	12	44	35	380	150	765	54
17.016.20.11	20	24 - 28	405	357	40	62	140	13	60	40	440	180	932	94

Minimum Ultimate Strength = 4 x WLL.

WLL= Working Load Limit on head fitting.

Tapered roller bearings.

Standard fitted with becket hole.

Certificate on request only and at additional costs.